


CONSTRUCTION

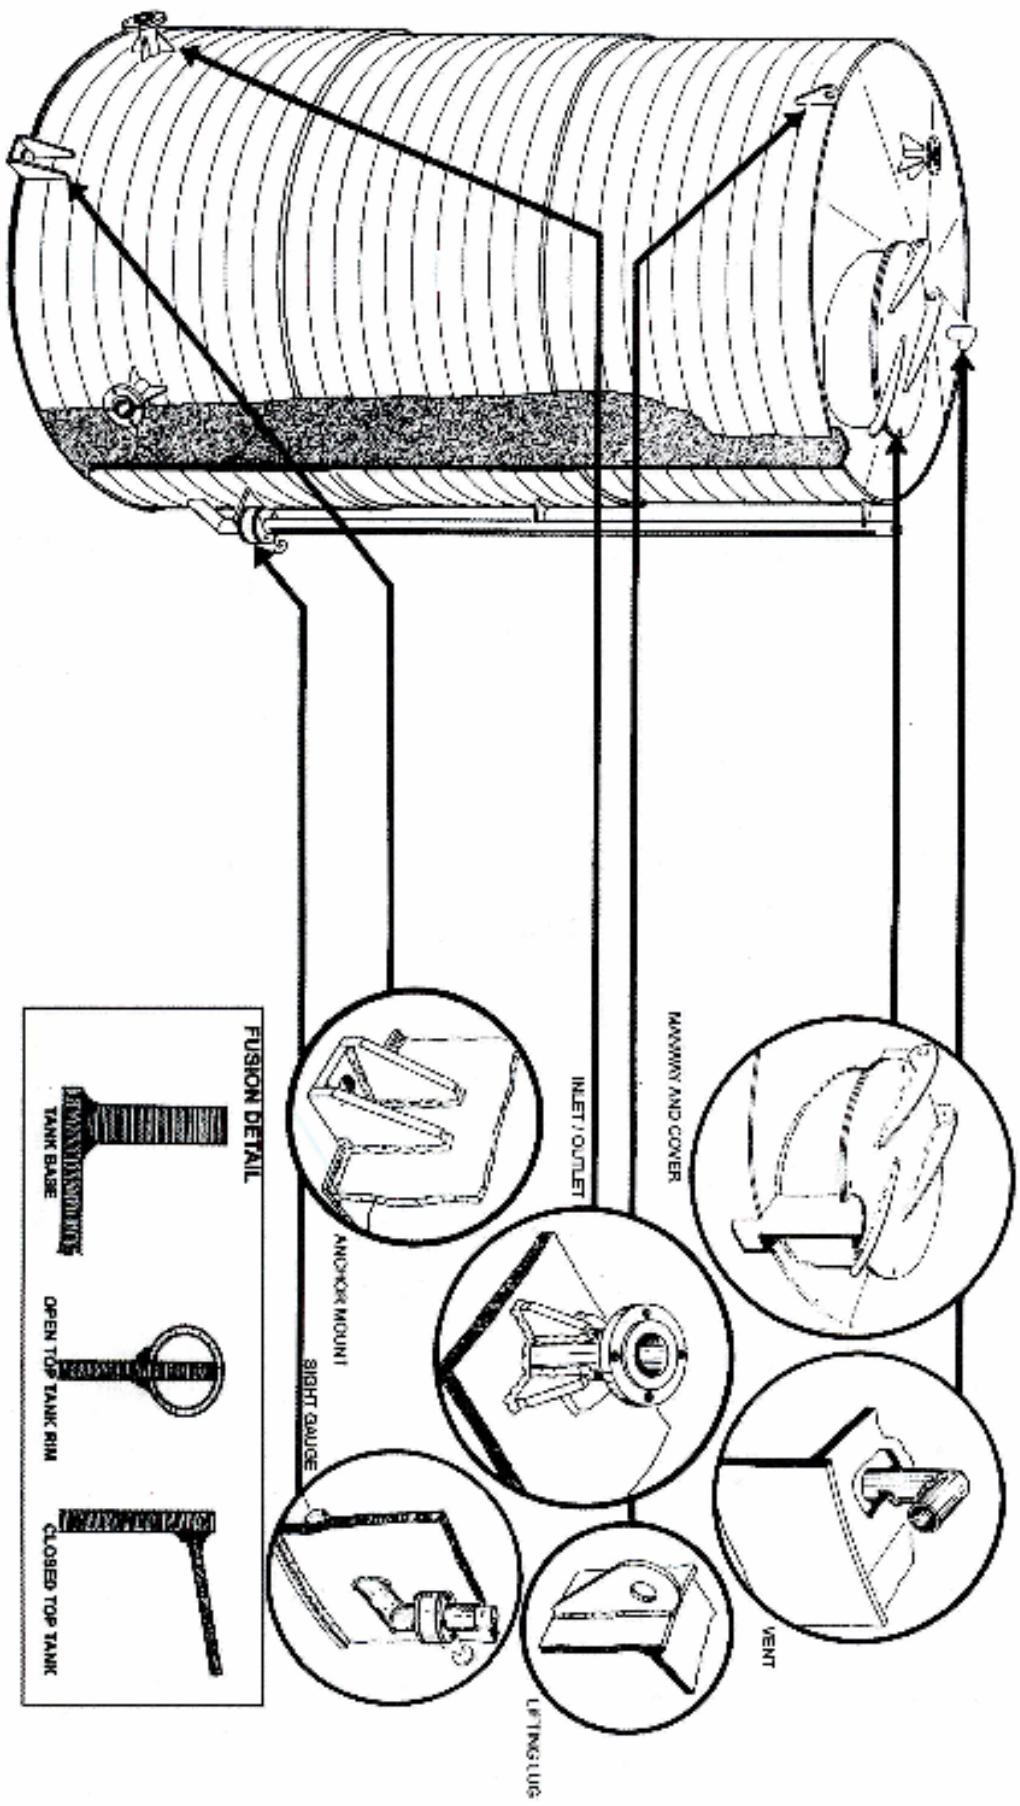

Product Range

Weholite HDPE Tanks are available in a standard capacity from 500 to 15,000 USG. The tanks are provided with a variety of fittings and accessories, i.e. flanged inlets and outlets, man-hole, air vent. (For higher capacities and special requirement contact - Amlantit Oman)

Generally Weholite Spiral HDPE Tanks are customer specific and manufactured accordingly. The lightweight and robust double walled construction offers owners a non-metallic answer to liquid containment in the difficult Middle East environment.

A




OPEN TOP

B



FLAT TOP COVER

C



CONICAL TOP COVER

D



FLAT ENDS

E



DISH ENDS

Selection of Typical Configurations

TANK CAPACITY		VERTICAL TANK				HORIZONTAL TANK				
USG	LTRS.	TANK DIA	STORAGE	OVERALL HEIGHT mm			TANK DIA	STORAGE	OVERALL LENGTH mm	
		mm	HEIGHT	A	B	C	mm	LENGTH	D	E
500	1890	1000	2406	2526	2693	2693	1000	2406	2805	3106
1000	3780	1200	3342	3509	3709	3709	1200	3342	3742	4042
1100	4158	1200	3676	3860	4060	4060	1200	3676	4076	4376
1200	4536	1500	2566	2695	2945	2945	1200	4010	4410	4710
1300	4914	1500	2780	2919	3169	3169	1200	4344	4744	5044
1400	5292	1500	2994	3144	3394	3394	1200	4678	5078	5378
1500	5670	1500	3208	3368	3618	3618	1200	5012	5412	5712
1600	6048	1500	3422	3593	3843	3843	1200	5347	5747	6047
1700	6426	1500	3636	3817	4067	4067	1200	5681	6081	6381
1800	6804	1500	3850	4042	4292	4292	1200	6015	6415	6715
1900	7182	1500	4063	4267	4571	4571	1500	4063	4463	4763
2000	7560	2000	2406	2526	2860	2860	1500	4277	4677	4977
2100	7938	2000	2526	2653	2986	2986	1500	4491	4891	5191
2200	8316	2000	2647	2779	3112	3112	1500	4705	5105	5404
2500	9450	2000	3007	3158	3491	3491	1500	5347	5747	6047
3000	11340	2000	3609	3789	4123	4123	1500	6416	6815	7116
4000	15120	2000	4812	5053	5386	5386	2000	4812	5212	5512
5000	18900	2500	3850	4042	4459	4459	2000	6015	6415	6715
6000	22680	2500	4619	4850	5267	5267	2500	4619	5019	5319
7000	26460	2500	5389	5669	6076	6076	2500	5389	5789	6089
8000	30240	2500	6159	6467	6884	6884	2500	6159	6559	6859
9000	34020	2500	6929	7276	7692	7692	2500	5524	5924	6224
10000	37800	2800	6138	6445	6911	6911	2800	6138	6538	6838
11000	41580	2800	6751	7089	7556	7556	2800	6751	7161	7451
12000	45360	2800	7365	7733	8200	8200	2800	7365	7765	8065
13000	49140	3000	6951	7298	7798	7798	3000	6951	7351	7651
14000	52920	3000	7485	7860	8360	8360	3000	7485	7885	8185
15000	56700	3000	8020	8421	8921	8921	3000	8020	8420	8720

WATER RETENTION TANK



MANUFACTURED IN OMAN UNDER LICENCE OF M/S KWH PIPE FINLAND BY:

Amiantit Oman Co. LLC

P.O.Box 417, Central Post Office, Postal Code 111, Sultanate of Oman
Telephone : +968 24446600 (6 Lines) - Fax : 24446611
Telex : 5304 AMIANTIT ON
e mail : amian@omzest.com - Website : www.amiantitoman.com